SANTIAGO

Virginia Tile Company

Glazed Porcelain

VIRGINIATILE

TECHNICAL INFORMATION

- V3 Moderate Variation
- Stock Ready Ship
- Recommend offset pattern ≤33%
- PEI Rating 4
- DCOF: ≥ 0.42
- Frost Resistant
- Water Absorption: ≤ 0.5%
- Made in USA
- Green Squared

COLORS

White | VTC SGWH

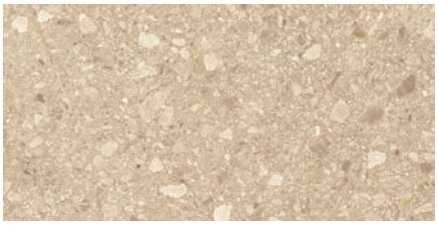

Beige | VTC SGBE

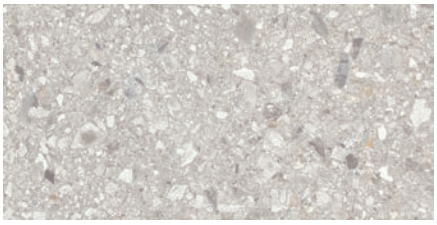

Light Gray | VTC SGLG

Dark Gray | VTC SGDG

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 425 lbs
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance - Unglazed	N/A
Frost Resistance	Resistant
Mohs Hardness - EN101	7
Water Absorption	≤ 0.5%
Certifications	Green Squared
Country of Origin	USA
Shade Variation Code	V3

TILES, MOSAIC AND TRIM*

SIZE	ACTUAL	THICKNESS	FINISH
24" x 48" Rectified	23.56" x 47.31"	9.00mm	Matte/Natural
32" x 32" Rectified	31.28" x 31.28"	9.00mm	Matte/Natural
24" x 24" Rectified	23.56" x 23.56"	9.00mm	Matte/Natural
12" x 24" Rectified	11.75" x 23.56"	9.00mm	Matte/Natural
2" x 2" Mosaic Rectified	11.75" x 11.75"	9.00mm	Matte/Natural
4" Deco Hex Mosaic Rectified	13.60" x 11.20"	9.00mm	Matte/Natural
3" Hexagon Mosaic Rectified	10.25" x 11.75"	9.00mm	Matte/Natural
3D Hex Mosaic Rectified	9.45" x 11.37"	9.00mm	Matte/Natural
Sphere Mosaic Rectified	13.70" x 14.20"	9.00mm	Matte/Natural
4" x 12" Bullnose Rectified	4.00" x 11.75"	9.00mm	Matte/Natural

* Not all sizes are available in all colors and finishes.

APPLICATION**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	•
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial	•	

** These recommendations are not defined by ANSI Standards

Please see virginiatile.com for details.