

TILE BATH & SHOWER ORGANIZATION & ACCESSIBILITY *Product Guide*

Baskets	8-14
Hooks	15-17
Towel Bars	
Toilet Paper Holde	ers19
Grab Bars	20-26

27
28
29
31

Avoid Defective Tile Showers

TileWare's Mission

- Stop blind drilling into finished tile, which penetrates the interior wall cavity, puncturing waterproofing, plumbing and electrical components and voiding shower system warranties.
- Our patented PermaTileTM Rough-In Anchors are installed with the tile, eliminating the need to drill through tile.
- Our anchors support our wide selection of beautiful shower accessories that will never loosen or pull away when mounted to tile surfaces we mean <u>never</u>!
- Protect waterproofing while ensuring you can enjoy strong and reliable accessories for a lifetime.

Eliminating Hazards

- Blind drilling produces unwarranted penetrations, which occur in completed tile showers because lifestyle accessories weren't planned before the tile was installed.
- Unplanned blind drilling also negates manufacturers' waterproofing warranties, saddling the property owner with all future repair costs.
- In today's construction environment, where buildings are air-tight, it's imperative that water is unable to leak into the interior wall cavity, otherwise mold and bacteria will grow unnoticed in stale air spaces behind the wall.
- Stop blind drilling and avoid a host of vulnerabilities that create frustration and stress when eventually disclosed.

Combining Life and Style in One Conversation

- To create useful and lasting tile showers, homeowners and property owners must combine construction, style and functionality into a single planning agenda.
- To ensure all of these components properly come together, TileWare utilizes a concept called *Holistic Showers* a design recipe that combines and perfectly balances the elements of tile style with what you need to accommodate your individual lifestyle.
- Tile style incorporates all the emotion and feeling you desire in tile design, while lifestyle satisfies your personal care and comfort needs and ensures that you get more than just pretty walls and water. With our products, form and function meet their mutual responsibilities while also maintaining complete construction integrity.
- Our accessories work flawlessly together to become part of a complete tile shower design and enable you to create, fully utilize and enjoy this essential, frequently-used space in your home.
- And because our anchoring method is so unique, we can scale our accessories and escutcheons with a smaller surface footprint, resulting in sleek, minimal styling that blends with and compliments any space.

ATTACH TO, NOT THROUGH.

Planning from the Start

- **1.** The secret to building holistic tile showers is understanding the relationship between tile design and installation and the importance of taking the time to plan and select lifestyle accessories before your project begins so they can be installed along with waterproofing.
- **2. Timing is everything.** Homeowners and property owners clearly understand that tile materials must be selected and arranged prior to installation. What's not as clear, however, is that accessories in tile surfaces also need to be selected and arranged prior to installation to ensure waterproofing and construction integrity.
- **3.** Selecting together reinforces homeowner confidence it's assuring to know that the right materials have been situated on your jobsite from the start and that your project will involve an accountable installation workflow resulting in a beautiful, reliable and waterproof tile shower assembly.
- **4.** The whole tile installation story is structured around a material called thinset, which is the adhesive that secures tile to floors and walls. It's the workhorse that ensures your tile products stay securely attached to substrates like tile board. However, when thinset is applied, it generally cures within hours, closing the window on any design decisions. When this window closes, any changes or corrections become totally impractical. It's one of the most important technical elements of tile construction and its permanency provides genuine motivation for intentional design and planning.
- **5.** No tile professional wants to remove tile with cured thinset, because the removal process is difficult, time-consuming and creates a risk of damaging established waterproofing.
- **6.** By planning ahead and installing TileWare's products along with your tile, you can avoid unnecessary corrections and begin to comfortably and confidently enjoy your new tile shower.


So, if you plan on investing your time and resources in a custom tile shower equipped with professional waterproofing, don't wait until after your tile installation is completed to select and arrange your accessories. Instead, we invite you to consider TileWare Products' baskets, shelves, hooks, towel bars, toilet paper holders, foot props and ADA-compliant grab bars as you plan, which will enable you to build a waterproof, strong and safe shower space. With TileWare, plan on enjoying a tile shower that not only looks beautiful, but works beautifully.

This booklet was arranged with both homeowners and tile professionals in mind. As you view the pages that follow, we know that you will discover unique products and anchoring solutions for you and/or your customers that will last a lifetime.


BUY US ONCE FOR LIFE.

Installations that occur with tile, not after

Organization Products

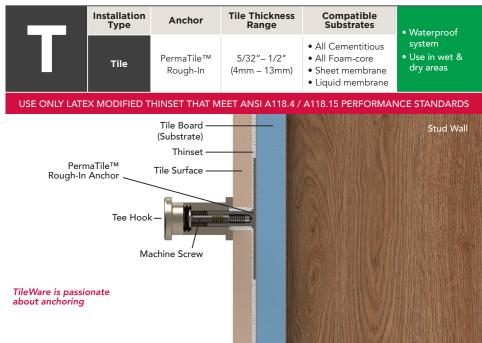


Accessibility ADA Grab Bars

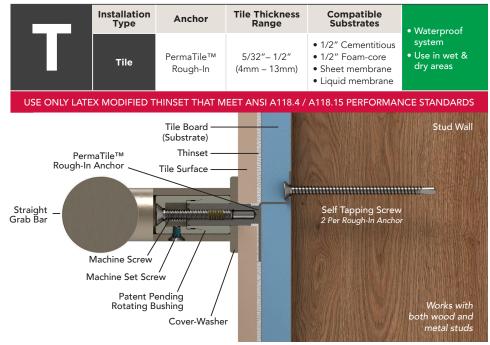


Installations for Gypsum Wallboard (drywall) requiring blocking

Organization Products

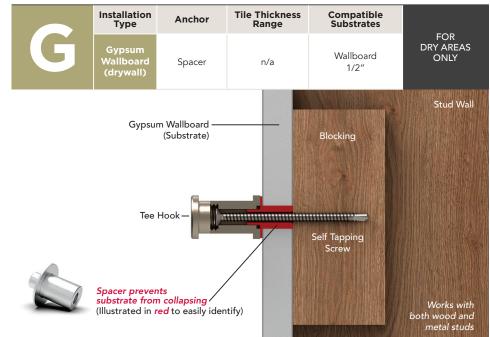

Accessibility ADA Grab Bars

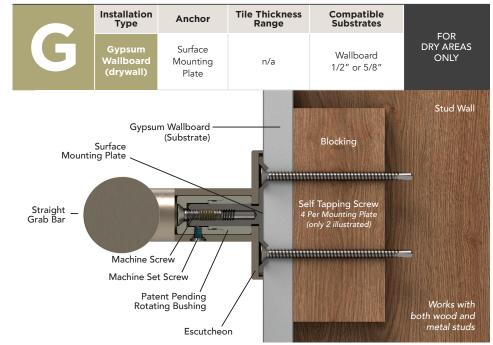

©2012-2020 TileWare Global, LLC dba TileWare Products. All rights reserved. Perma Tile™ Fastener Patented. US Patent No. 8,161,700, Australian Patent No. 2011205360, Canadian Patent No. 2,787,033

Kit Color Codes

Packaging codes apply to all product categories



Kit includes: (1) PermaTile™ Rough-In Anchor with all the trim & screw components necessary to complete one tile installation



Pictured: T101-211-PC



Kit includes: Anchor/s with all the trim & screw components necessary to complete one

gypsum wallboard (drywall)

installation



Pictured: G101-212-BN



Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

Kit includes: trim & screw components (only) for one tile installation. Mating PermaTile[™] Rough-In Anchor packed and sold separately






Kit includes: (1) PermaTile™ Rough-In Anchor (only) for one tile installation. Mating trim & screw components packed and sold separately



Shower Accessory Worksheet

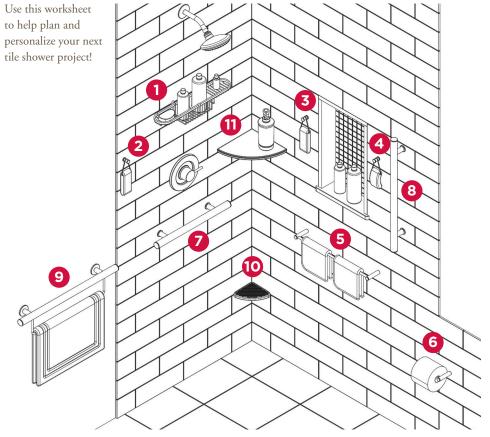

1. Basket storage can be positioned above or below shower lever. Corner models available	8-14
2. Organize robes or body towels outside the shower in tile	15-17
3. Organize loofahs, poofs, scrubbers or anything that hangs with a rope in the shower	15-17
4. Combine hooks with niches to organize hanging utilities as well as containers	15-17
5. Organize and arrange washcloths in the shower	
6. Organize a toilet paper holder in tile surfaces. Available for gypsum wallboard (drywall)	19
7. Position grab bars horizontally in the shower, above or below shower lever	20-26
8. Position grab bars vertically in the shower. Can also be positioned diagonally	20-23
9. Match grab bars (w/optional towel bar) outside the shower in gypsum wallboard (drywall)	20-26
10. Foot prop for shaving legs or washing lower extremities	27
11. Claddy-T [™] Shelf combines metal and glass to transform corner shelving	

CAP STYLES & FINISHES

Select the cap that best resembles your shower lever.





©2012-2020 TileWare Global, LLC dba TileWare Products. All rights reserved. PermaTile™ Fastener Patented. US Patent No. 8,161,700, Australian Patent No. 2011205360, Canadian Patent No. 2,787,033


Pictured: PT100-507



9

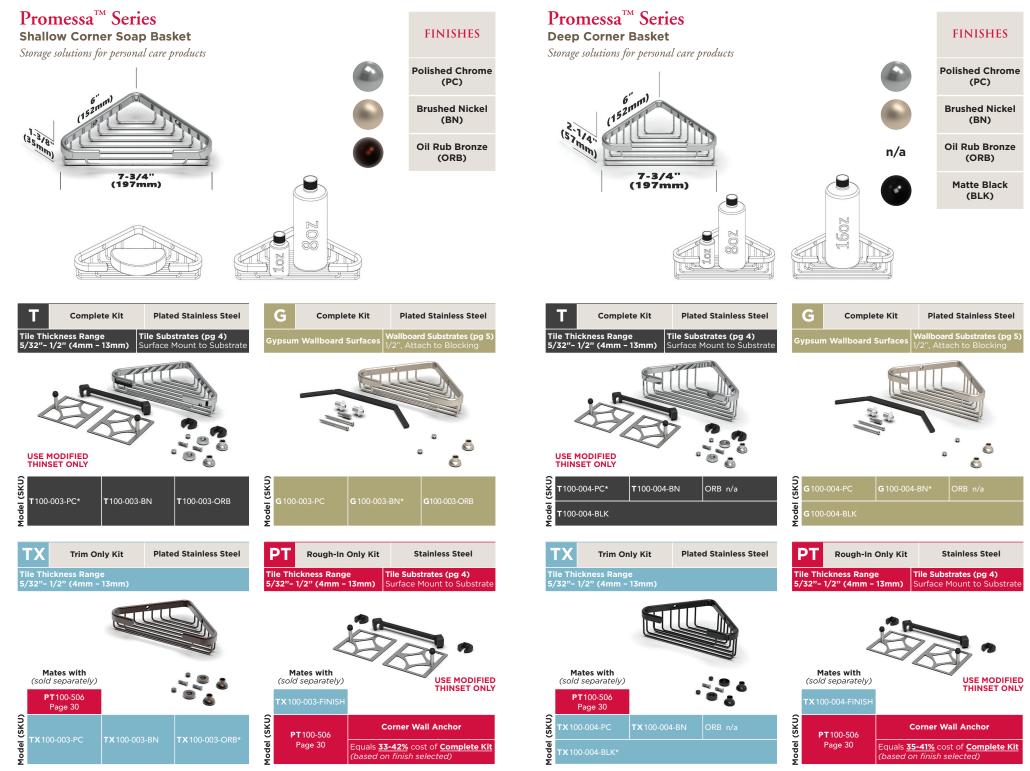

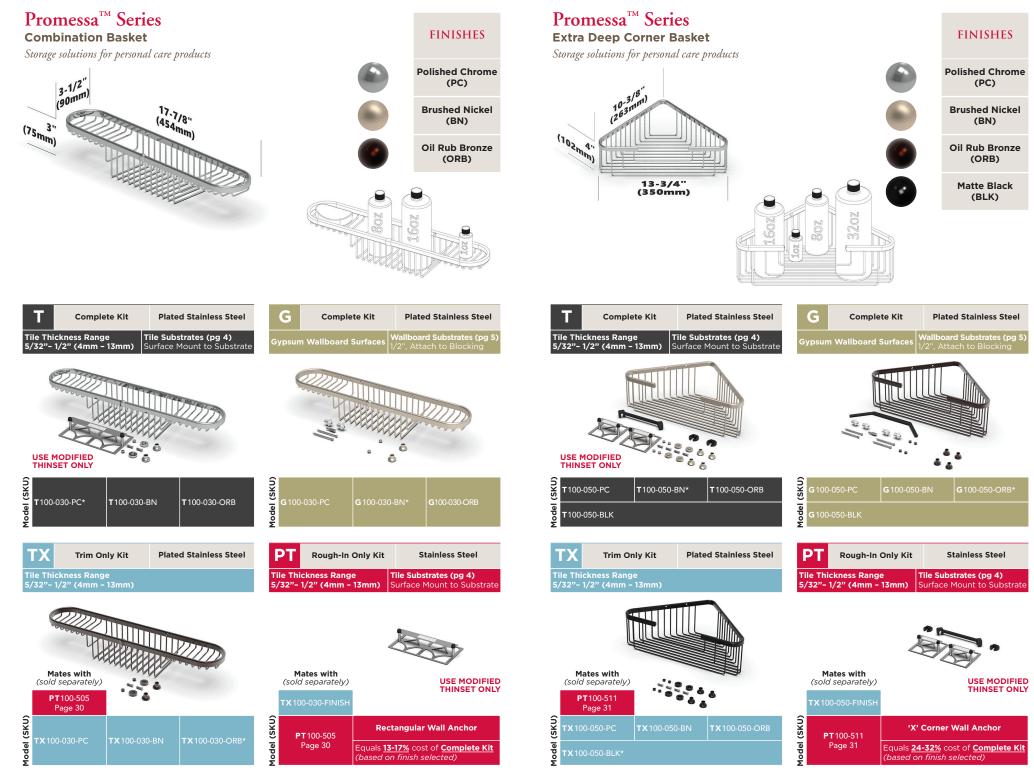


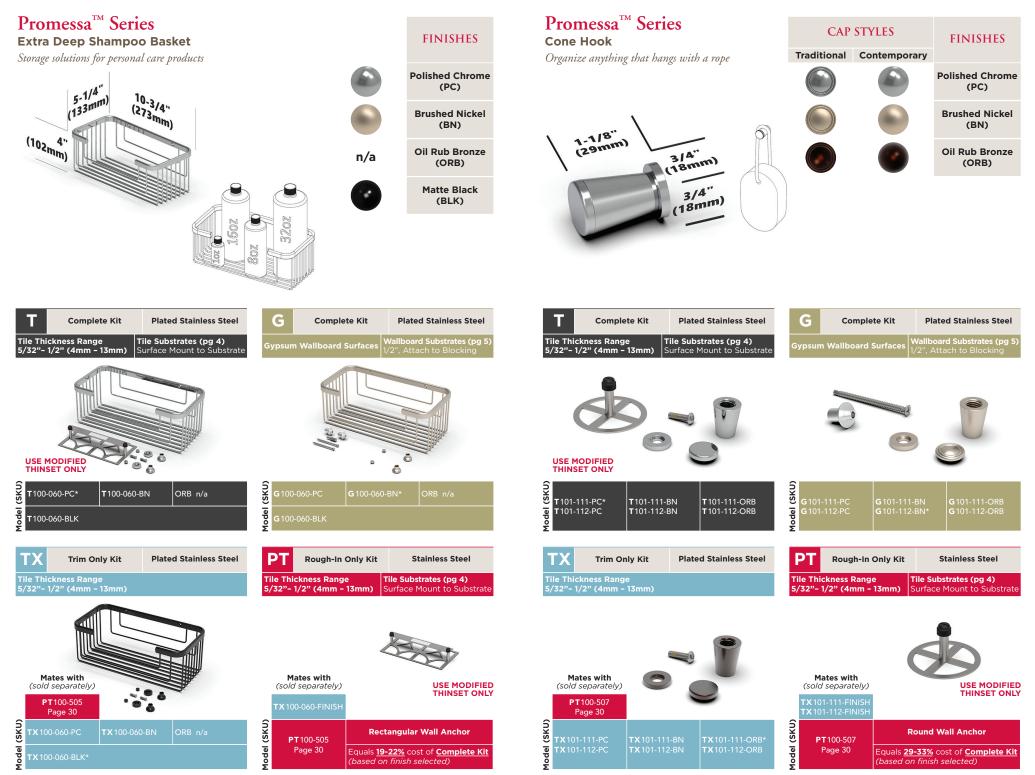

Promessa [™] Series Tee Hook Organize anything that hangs with a rope	CAP STYLESFINISHESTraditionalContemporaryPolished Chrome (PC)Image: Image: Im	Promessa [™] Series Thumb Hook Drganize anything that hangs with a rope	CAP STYLESFINISHESTraditionalContemporaryImage: ContemporaryImage: Contemporary
Complete Kit Plated Stainless Steel Tile Thickness Range Tile Substrates (pg 4) 5/32"- 1/2" (4mm - 13mm) Surface Mount to Substrate Output Ustrace Mount to Substrate	GComplete KitPlated Stainless SteelGypsum Wallboard SurfacesWallboard Substrates (pg 5) (2°, Attach to Blocking)	TComplete KitPlated Stainless SteelTile Thickness Range 5/32"- 1/2" (4mm - 13mm)Tile Substrates (pg 4) Surface Mount to SubstrateOutput Surface Mount to SubstrateUse Mount for SubstrateUs	Complete KitPlated Stainless SteelGypsum Wallboard SurfacesWallboard Substrates (pg 5) (2". Attach to Blocking
T101-211-PC T101-212-PC T101-211-BN T101-212-BN* T101-211-ORB T101-212-ORB T101-211-BLK T101-212-BLK T101-212-BK TX Trim Only Kit Plated Stainless Steel Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) File Thickness Compared to the stainless Steel	Offer G101-211-PC G101-212-PC G101-211-BN G101-212-BN G101-211-ORB* G101-212-ORB Offer G101-211-BLK G101-212-BLK G101-212-ORB PT Rough-In Only Kit Stainless Steel Tile Thickness Range 5/32"- 1/2" (4mm - 13mm) Tile Substrates (pg 4) Surface Mount to Substrate	T101-311-PC* T101-311-BN T101-311-ORB T101-312-PC T101-312-BN T101-312-ORB TX Trim Only Kit Plated Stainless Steel Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)	Of Digg G 101-311-PC G 101-311-BN G 101-311-ORB G 101-312-PC G 101-312-BN* G 101-312-ORB PT Rough-In Only Kit Stainless Steel Tile Thickness Range Tile Substrates (pg 4) 5/32"- 1/2" (4mm - 13mm) Surface Mount to Substrate
Mates with (sold separately) Image 30 PT100-507 Page 30 Image 30 TX 101-211-PC TX 101-212-PC TX 101-211-BN TX 101-212-BN TX 101-211-ORB TX 101-212-ORB TX 101-211-BLK TX 101-212-BLK* TX 101-212-BLK*	Mates with (sold separately) TX101-211-FINISH TX101-212-FINISH PT100-507 Page 30 PT100-507 Fage 30 Round Wall Anchor Equals <u>29-33%</u> cost of <u>Complete Kit</u> (based on finish selected)	Mates with (sold separately) PT100-507 Page 30 TX 101-311-PC TX 101-3112-PC TX 101-311-BN TX 101-312-BN TX 101-311-ORB* TX 101-312-ORB	Mates with (sold separately) Use MODIFIED FINSET ONLY TX101-311-FINISH TX101-312-FINISH Use MODIFIED FINSET ONLY PT100-507 Page 30 Round Wall Anchor Equals 29-33% cost of Complete Kit (based on finish selected)

16 *Pictured

17

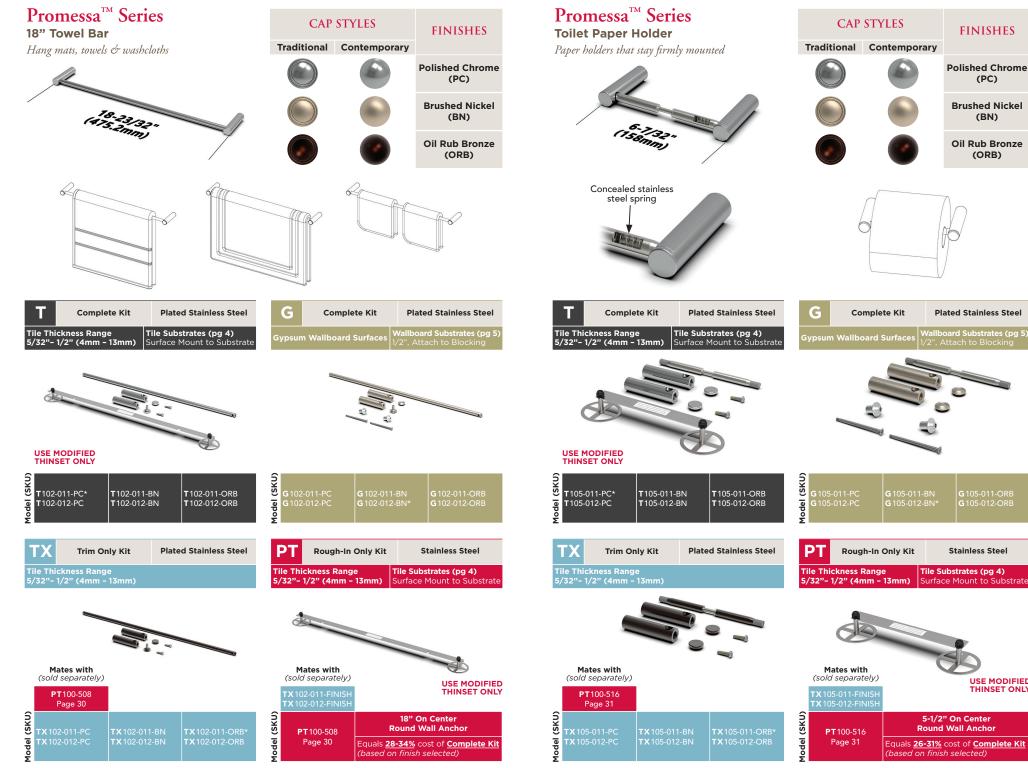

18 *Pictured 19

USE MODIFIED


THINSET ONLY

(PC)


(BN)


(ORB)




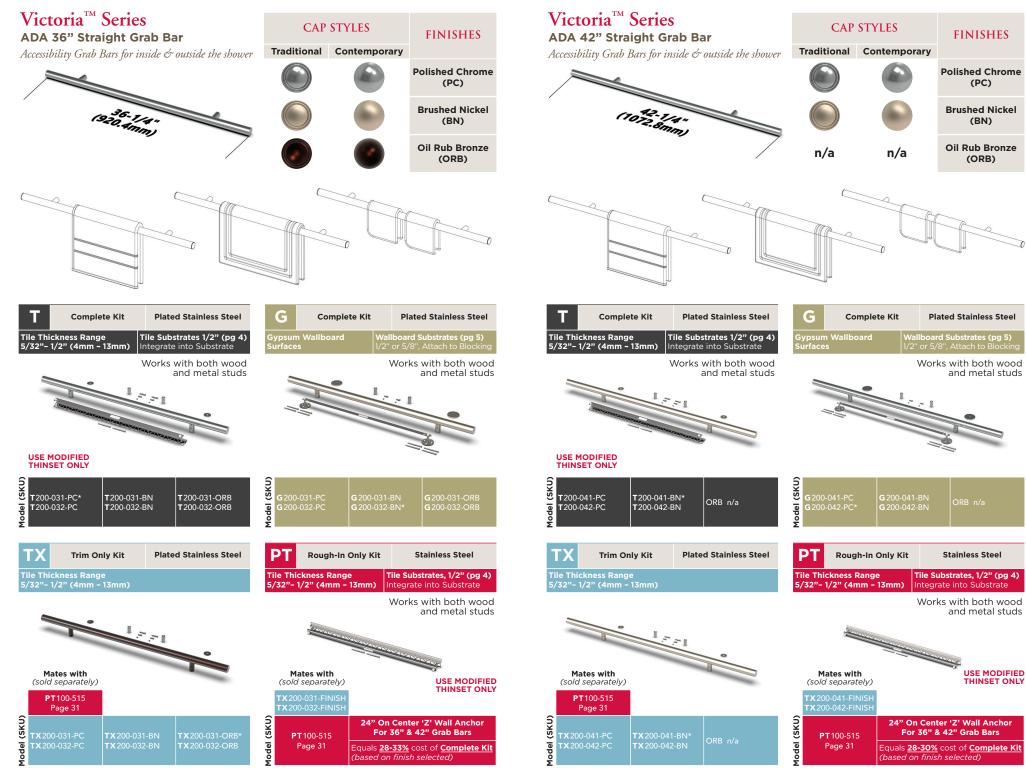

23

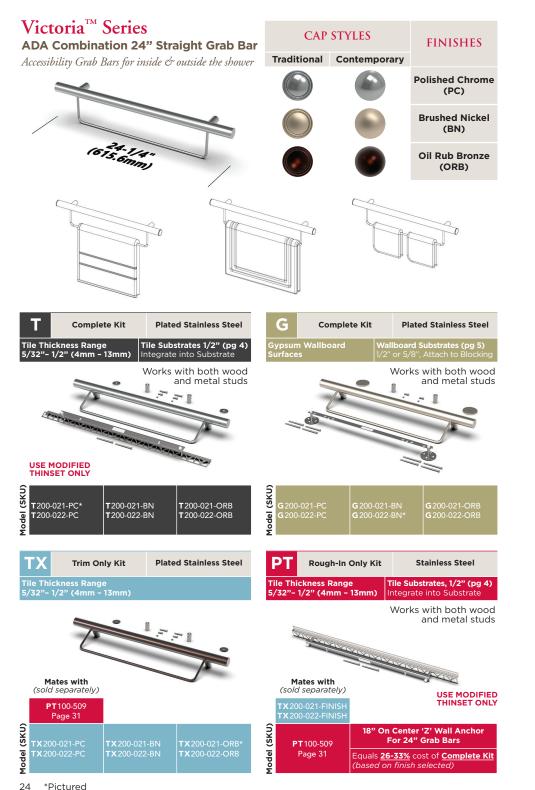

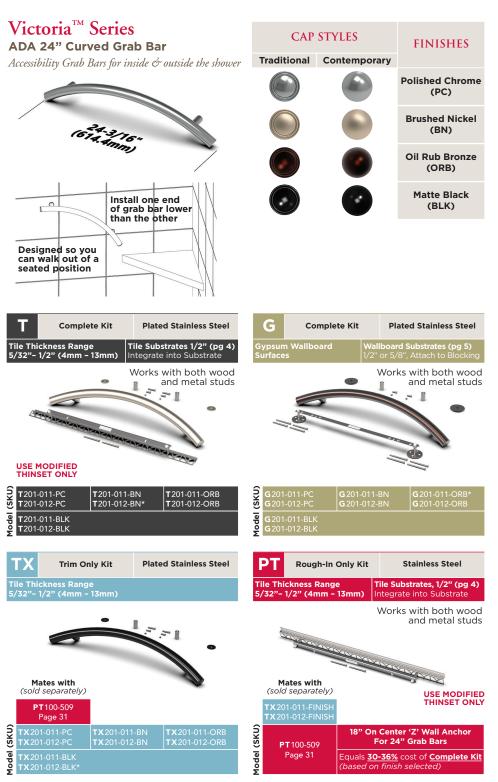

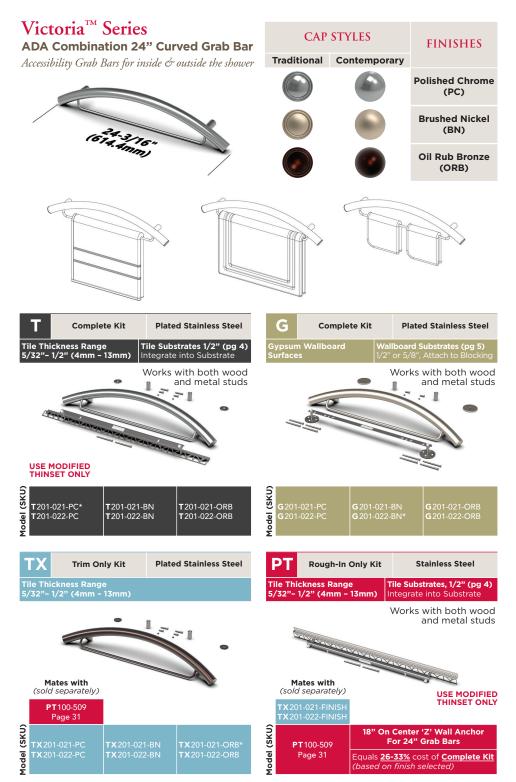


VictoriaTM Series

Foot Prop Assist & leg shaving foot rest...hotelier utility

(1) I S. (1) Internal (1) S. (






ТХ	Trim Only Kit	Plated Zinc
	ckness Range 1/2" (4mm – 13mm)	








ΡΤ	Rough-In Only Kit	Stainless Steel
		Tile Substrates Surface Mount to Substrate



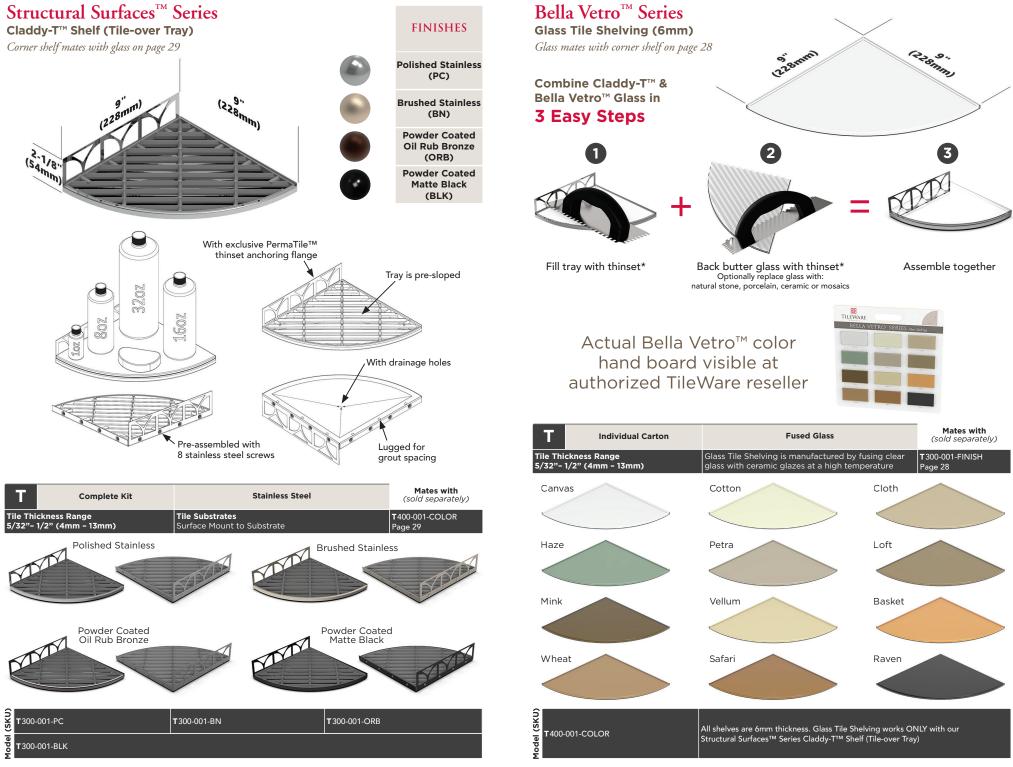

PermaTile[™] Series


Rough-In Tile Wall Anchors

Always keep your tile project moving with Rough-In!

Anchoring Features and Benefits:


- 1. Anchors that Never Fail
- 2. Super Strong Like Rebar in Cement
- Stainless Construction Will Not Rust 3.
- 4. Stops Unwarranted Hole Drilling
- Protects Waterproofing Systems 5.
- Professional Anchoring Technology 6.
- 7. Tile Exclusive System
- 8. Easy to Install & Maintenance Free
- 9. Tested by the TCNA
- 10. Installs with Machine Screws NOT Wood Screws

PT Rough-In Only Kit			Stainle	ss Steel	ΡΤ	Rough-In	On
	ckness Range 1/2" (4mm –		File Substrate Surface Mount			ickness Rang 1/2" (4mm -	
	MODIFIED SET ONLY					MODIFIED	
Model (SKU)	PT 100-505	Rect	tangular Wall	Anchor	Model (SKU)	PT 100-506	
Mates w	/ith (sold sep	arately)			Mates v	with (sold se	oara
TX 100-0	02-FINISH			Page 9	TX 100-	003-FINISH	
TX 100-0	30-FINISH			Page 12	TX 100-	004-FINISH	
TX 100-0	60-FINISH			Page 14			



Rough-In Only Kit

Stainless Steel



PT Rough-In Only Kit Stainless Steel			ΡΤ	Rough-In (Only Kit	Stainle	ss Steel		
Tile Thickness Range Tile Substrates (pg 4)				ickness Range		File Substrates			
5/32"- 1	/2" (4mm – 1	3mm) S	urface Mount	to Substrate	5/32"-	1/2" (4mm -	13mm)	Surface Mount	to Substrate
USE MODIFIED					MODIFIED SET ONLY				
Model (SKU)	PT 100-507	Ro	ound Wall An	chor	Model (SKU)	PT 100-508	R	18" On Cent ound Wall An	
Mates w	r ith (sold sepa	arately)			Mates v	with (sold sep	arately)		
TX 101-1		TX 101-11	2-FINISH	Page 15	TX 102-0		TX 102-0	12-FINISH	Page 18
TX 101-2		TX 101-21	2-FINISH	Page 16					
TX 101-3		TX 101-31	2-FINISH	Page 17					

ΡΤ	Rough-In C	Only Kit	Stainle	ss Steel	Р
	ckness Range 1/2" (4mm – 1		Tile Substrates		Tile 5/3
2	NAME OF CONTROL OF CON				
	MODIFIED SET ONLY		- AND	K	U T
Model (SKU)	PT 100-509	18" Oi	n Center 'Z' Wa For 24" Grab I		Mo (SI
Mates w	/ith (sold sepa	arately)			Ma
TX 200-0		TX 200-(012-FINISH	Page 21	тх
TX 200-0		TX 200-(022-FINISH	Page 24	
TX 201-0		TX 201-0	012-FINISH	Page 25	
TX 201-0		TX 201-0	022-FINISH	Page 26	

D

Model (SKU)

P٦

Model (SKU)

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

USE MODIFIED

THINSET ONLY

Tile Thickness Range 5/32"- 1/2" (4mm - 13mm)

USE MODIFIED THINSET ONLY

PT100-515 Mates with (sold separately)

PT100-513 Mates with (sold separately)



Rough-In Only Kit	t Stainle	ss Steel	ΡΤ	Rough-In (Only Kit	Stainle	ess Steel
kness Range /2" (4mm – 13mm)	Tile Substrates Surface Mount			:kness Range /2" (4mm -			, 1/2" (page 4 Substrate
			ß		Yan yangan y	IN and	
							KAK
PT100-513	Foot Prop Wall A	nchor	Model (SKU)	PT 100-514		Center 'Z' W or 18" Grab	
ith (sold separately)	,		Mates w	ith (sold sep	arately)		
		Page 27	TX 200-0		TX 200-00	2-FINISH	Page 20
Rough-In Only Kit	Tile Substrates			Rough-In (e Ti	le Substrate	
/2" (4mm - 13mm)	Integrate into	Substrate		/2" (4mm -	13mm) Su	urface Moun	It to Substrate
IODIFIED ET ONLY							>
	On Center 'Z' W or 36" & 42" Gra		Model (SKU)	PT 100-516		-1/2" On Ce und Wall A	
ith (sold separately)			Mates w	ith (sold sep	arately)		
31-FINISH TX200	0-032-FINISH	Page 22	TX 105-0	11-FINISH	TX 105-01	2-FINISH	Page 19
1-FINISH TX 200	0-042-FINISH	Page 23					

This chart explains how TileWare works with your tile shower materials

1	Material Categories	2 Points to Learn About	3 Important Selection and Installation Details
	Tile	Tile Thicknesses	PermaTile™ Rough-In Anchors generally work with tile thicknesses from 5/32″ to 1/2″ (4mm – 13mm).
e:	-	Tile Anchoring Locations	Anchors can be located in the grout joint or drilled into the tile body.
ALWAYS SELECT TILE & ACCESSORIES TOGETHER		Organization: Baskets and Shelving	Both single and corner wall baskets are available. Great for salon containers and bar soaps. Position above or below the shower valve trim without violating waterproofing or plumbing. As an additional solution, use in applications where the structure prohibits niches or on masonry walls.
CCESSORI		Organization: Hooks	Organize anything that hangs with a rope: soaps, poufs, scrubbers, sponges, loofahs, body brushes, robes, squeegees, towels and washcloths, shower caps, toys and clothing. Great in conjunction with niches.
E & A	sories	Organization: Towel Bars	Organize washcloths inside the shower or bath mats and towels outside the shower. Great in conjunction with niches.
ELECT TIL	Accessories	Organization: Claddy-T™ Corner Shelving	Metal corner shelving with colored fused glass. 12 pre-sized glass tiles available. Can also install natural stone, porcelain and ceramic (even mosaics) in the metal tray. Pre-sloped for drainage and lugged for grout spacing.
ALWAYS SI		Accessibility: Grab Bars	ADA compliant grab bars that don't look institutional. Minimal design with small escutcheons and wall terminations. Can position straight models horizontally, diagonally or vertically. Curved grab bars also available to assist with sitting and standing where a seat is needed.
		Accessibility: Foot Prop	Assistive foot rest for shaving legs and washing lower extremities. Includes low profile treads for slip resistance. Great for use in the hospitality industry.
		General Accessory PermaTile™ Rough-In Anchors	General accessory Rough-In Anchors, made from stainless steel. Engineered to install on top of waterproofed substrates. Anchors are positioned behind tile in A118.4 or A118.15 thinset adhesives.
DN	g & Tools	Grab Bars PermaTile™ Rough-In 'Z' Anchors	Grab Bar Rough-In 'Z' Anchors, made from stainless steel and were engineered to install with tile substrates. After waterproofing, install tile using A118.4 or A118.15 thinset adhesives.
WATERPROOFI	Thinset, Timing & Tools	Drilling	With general accessory anchors and when installing grab bars with small format tile, use a 3/8" or 10mm diamond core bit to drill the hole/s necessary to accommodate Rough-In Anchors. For large format tiles, we provide a cover-washer option for grab bars that allows up to a 3/4" or 20mm diamond core bit so thinset ridges can be collapsed.
RIALS &	F	Mounting Accessories/ Trim	Before mounting accessories on tile surfaces, Rough-In Anchors need to cure in thinset for 24 hours. Accessories can be immediately installed after grouting.
THE RIGHT METHODS, MATERIALS & WATERPROOFING		Foam-core Systems	PermaTile™ Rough-In 'Z' Anchor needs to be attached to wood or metal studs in 2 locations. Rough-In 'Z' Anchors will waterproof with foam-core bonded shower systems or approved polyurethane-based adhesive sealant systems.Tile is then installed on top of waterproofed system using A118.4 or A118.15 thinset adhesives.
HE RIGHT M	terproofing	Sheet Membrane Systems	PermaTile™ Rough-In 'Z' Anchor needs to be attached to wood or metal studs in 2 locations. Rough-In 'Z' Anchors will waterproof with (thinset applied) sheet membrane systems. Tile is then installed on top of waterproofed system using A118.4 or A118.15 thinset adhesives.
USE T	Wate	Liquid Membrane Systems	PermaTile™ Rough-In 'Z' Anchor needs to be attached to wood or metal studs in 2 locations. Rough-In 'Z' Anchors will waterproof with liquid applied membrane systems that have the capacity to adhere to stainless steel. Tile is then installed on top of waterproofed system using A118.4 or A118.15 thinset adhesives.
		Waterproofing Weld Projections	Works with approved sheet membrane gaskets that are thinset applied or with polyurethane-based or hybrid elastomeric adhesive sealants.
			tilewareproducts.com



info@tilewareproducts.com

Technical Support: (828)-322-9273 Hickory, NC (EST)

©2012-2020 TileWare Global, LLC dba TileWare Products. All rights reserved. PermaTile™ Fastener Patented. US Patent No. 8,161,700, Australian Patent No. 2011205360, Canadian Patent No. 2,787,033